

PROGRAMMING OF COORDINATE MEASURING MACHINE USING GENETIC ALGORITHM

Miha-Kovacic, Miran-Brezocnik, Joze-Balic, Franci-Cus

Faculty of Mechanical Engineering, Maribor, Slovenia

Abstract – The need for efficient and reliable tools for programming of CNC coordinate measuring machine is rapidly increasing in modern production. The proposed concept based on genetic algorithms assures generation and optimisation of NC measuring programs for measuring machine. Therefore the structure, undergoing simulated evolution, is the population of NC measuring programs. The NC measuring programs control the tactile probe, which performs simple elementary motions in the discrete measuring area. During the simulated evolution the probe movement becomes more and more optimised and intelligent solutions emerge gradually as a result of the low level interaction between the simple probe movements and the measuring environment. Different examples of CNC programming of measuring machine are given. Results show universality and inventiveness of the approach.

Keywords coordinate measuring machine, computer aided quality control, genetic algorithms

1. BASIC INFORMATION

Nowadays, the need for rationality of production processes and systems, lowest possible manufacturing costs and high quality of goods increases. So far, many different approaches to optimisation and modelling of production processes and systems have been developed to reach the goals set. Typical optimisation tasks in production are for example: optimisation of layout of machines in the production workshop, planning and optimisation of transport ways, optimisation of occupation of capacities of machines and devices, selection of optimum machining process, optimisation of the technological parameters for different kinds of machining etc. Also the programming of CNC machines can be defined as a manufacturing process, which must be executed in the optimum way. Since the CNC machines are already present in almost all manufacturing systems, the automatic programming of CNC machines became widespread in the last two decades. Thus, nowadays numerous commercial programming solutions, including automatic generation of NC measuring programs, are available.

The use of coordinate measuring machines (CMM-s) is rapidly increasing in modern production. Analysis of the research work in the area of automatic generation of NC measuring programs for CMM-s reveals that much research work was devoted to planning and optimising of tool paths, to simulation and interactive

control of measuring process [1-3]. The existing methods differ in reliability, efficiency, flexibility and universality. So far, it has not been possible to trace an universal solution for the optimisation problems occurring in the automation of the measuring process. Besides most researches in the area of optimisation of programming of modern CNC machines (and also of numerous other manufacturing processes and systems) still always uses above all conventional deterministic optimisation techniques. Since in modern production we have to do with combinatory explosion of different production scenarios and solutions, it is possible in most cases to obtain by conventional methods only sub-optimal solutions of problems.

However, in many different areas of science and technology it has been possible recently to notice the shift towards the conceiving of non-deterministic intelligent systems capable of learning and efficiently responding to increasing complexity, unpredictability, and changeability of the environment. During the learning process, the system behaviour gradually improves. Machine learning as the area of artificial intelligence is increasingly gaining importance [4]. Evolutionary computation (i.e., genetic algorithms, genetic programming, evolutionary programming, evolutionary strategies) and artificial neural network as the field of machine learning are probably most widespread. Several successful optimisations of manufacturing processes have been carried out by the use of evolutionary computation methods (see for example [4-7])

In this paper we used the genetic algorithms based approach to programming of coordinate measuring machines. The concept imitates the natural evolution of living organisms, where in the struggle for natural resources the successful individuals gradually become more and more dominant, and adaptable to the environment in which they live, whereas the less successful ones are present in the next generations rarely. In the proposed concept the NC programs undergo adaptation. During the simulated evolution more and more successful organisms (the NC programs) emerge on the basis of given data on tactile probe, part, and measuring environment. Researches have shown that the proposed concept is universal, flexible, reliable, and efficient.

2. AUTOMATED PATH PLANNING FOR CMM

Coordinate measuring machines are very precise Cartesian robots equip with tactile probes. Given a CAD model of manufactured part, the goal of dimensional inspection is to determine if the part meets its design specifications. The planner usually generates more or less optimal program for collision-free driving the CMM considering the probe, part set-up, and desired measurements. Figure 1 shows typical layout of coordinate measuring machine.

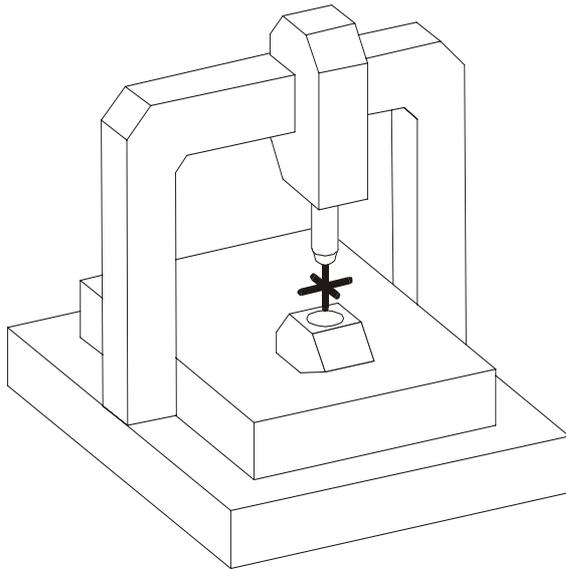


Figure 1. A typical coordinate measuring machine

3. CONCEPT OF THE SYSTEM

3.1 Basics

For solving the problem using genetic algorithms the part and tactile probe must be discretized. Figure 2 shows discretization of the part and tactile probe into points. Points can be represent as a boxes. The area of the possible probe motion is limited by the width and length of the CMM table and with height of the measuring area. The probe can move discretely up, down, forward, backward, to left and to right. The probe reference point is in the middle of the probe.

3.2 The algorithm

Figure 3 shows the general genetic algorithm [8-9] and figure 4 the main genetic algorithm used for programming of the CMM in the pseudo code. First it is necessary to enter the data on the part and tactile probe. In the proposed concept entering is effected automatically, directly from the CAD models of the part and probe. Then the system divides the measuring area into the desired number of points. At the end of the data input it is necessary to define the starting and

measurement point of the probe motion, and the probe reference point. Since now the system is capable of autonomous genetically based generating and optimising the NC measuring programs through several generations t .

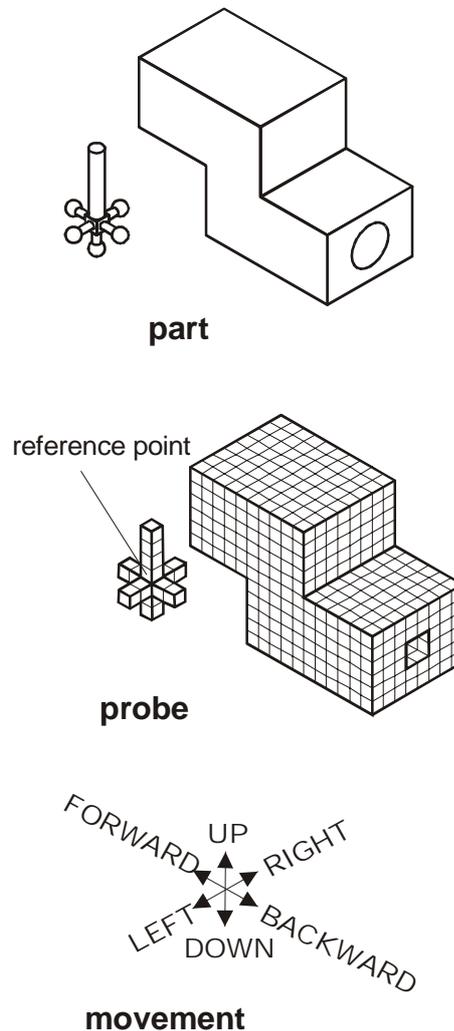


Figure 2: Discretization of the part and tactile probe

The Boolean variable decides whether the solution from previously performed measuring should be used for the initial population or the initial population should be initialised completely at random. Each chromosome (organism) in the population $P(t)$ represents a collision-free or a non-collision-free NC measuring program. Of course, in the initial generation most of the programs are non-collision-free. Each NC measuring program consists of list of simple movements. The evolutionary development of solution starts, when the initial randomly generated chromosomes have been evaluated. Greater probability of participating in the genetic operations of selection and changing is assigned to the solutions better solving the problem. Selection assures survival of more successful members of population and their progress in un-

changed form into the next generation. Changing influences one or several organisms and creates from them their offspring. After selection and changing a new generation is obtained which has to be evaluated, too. The process is repeated until the termination condition of the process has been fulfilled. That can be the greatest specified number of generations or sufficient quality of solutions.

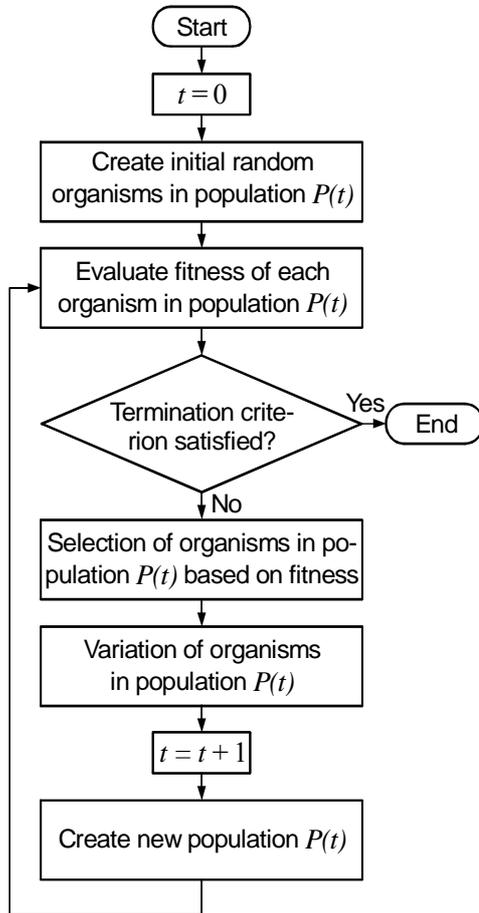


Figure 3. General process of GA method [8-9]

3.3 Coding of organisms

The randomly generated collision-free and non-collision-free (i.e. feasible and infeasible) NC measuring programs can be represented as a string with coordinates that are also called genes. The genes are simple movements representation of the tactile probe: UP, DOWN, LEFT, FORWARD and BACKWARD (Figure 2).

procedure GA_Coordinate_Measuring_machine

begin

data input on part and tactile probe

discretization of measuring field

defining of measurement points, starting, final and reference point of probe

begin

```

t ← 0
if known_NC_measuring_program
then input P(t)
else initialize P(t)
evaluate P(t)
while (not termination_condition) do
begin
t → t + 1
change P(t) by applying genetic operators
evaluate P(t)
end
end
output of results
end
  
```

Figure 4. Genetic algorithm for programming of CMM in pseudo code

3.4 Fitness measure

For solving the problem it is necessary to determine calculation of fitness. In general the fitness of the organisms in the civilization is representing by curve (figure 5). The curve starts at generation 0 with corresponding fitness produced and ends at the generation in which a sufficient quality of solution is produced.

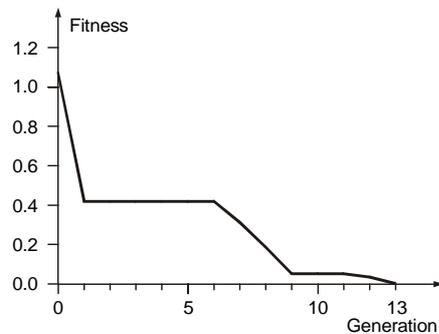


Figure 5. General look-out of the fitness curve for one of the best organisms

The fitness comprises three independent components:

- Component taking into account the length of NC measuring program (shortest program, higher value of fitness),
- Component taking into account the probe to measurement point distance (smaller distance, higher value of fitness),
- Component taking into account the number of collisions (more collisions, lower value of fitness).

Note that higher value of fitness represents better result. The influences of the program length, distance from probe to measurement point and number of collisions on the resulting fitness are considered in the ratio 1:2:10. The number of collision depends on collided volume of tactile probe. For example, figure 6 shows the scenario where the number of collisions is equal 2.

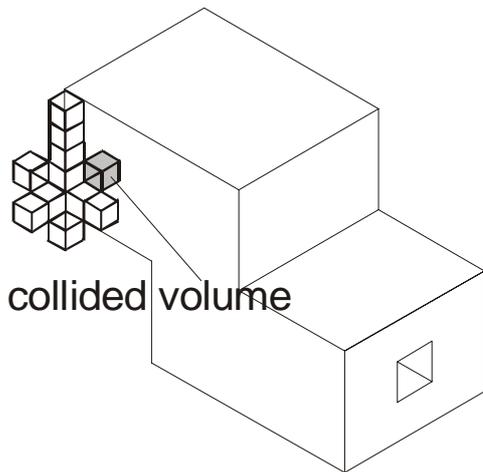


Figure 6. Number of collisions

3.5 Genetic operations

After initialisation of the initial population of NC measuring programs and its evaluation the population of the organisms must be changed by genetic operations. We used the operations of reproduction (selection, figure 7), crossover (figure 8) and mutation (figure 9) [5-7]. For selection of chromosomes the tournament selection was used.

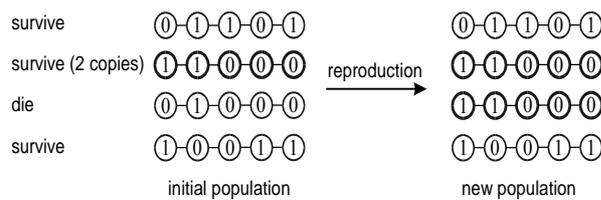


Figure 7. Operation of reproduction in GA




Figure 8. Operation of crossover in GA




Figure 9. Operation of mutation in GA


4. RESULTS

The universality, intelligence, autonomy of the proposed concept, and the self-organizational improvement to more successful solutions are presented by simple example.

The evolutionary parameters were: population size of 50, probability of reproduction 0.2, probability of crossover 0.6 and probability of permutation 0.2. The tournament selection of organisms with tournament size 7 was used.

Figure 10 shows the results of single run. Only the best organisms are shown. It is necessary to emphasise that at this stage of research we tried to assure particularly the flexibility and universality of the system, where only simple rules of behaviour are permissible such as: 1) discrete movements of tactile probe in six directions, 2) damages to probe and measuring machine are not permissible, 3) the measurements should be made fastest possible by adhering to the first two rules.

The number of probes steps, required for the measurement of the part in generation 0 was 24. The probe did not get close to the measuring point and did not collided with the part.

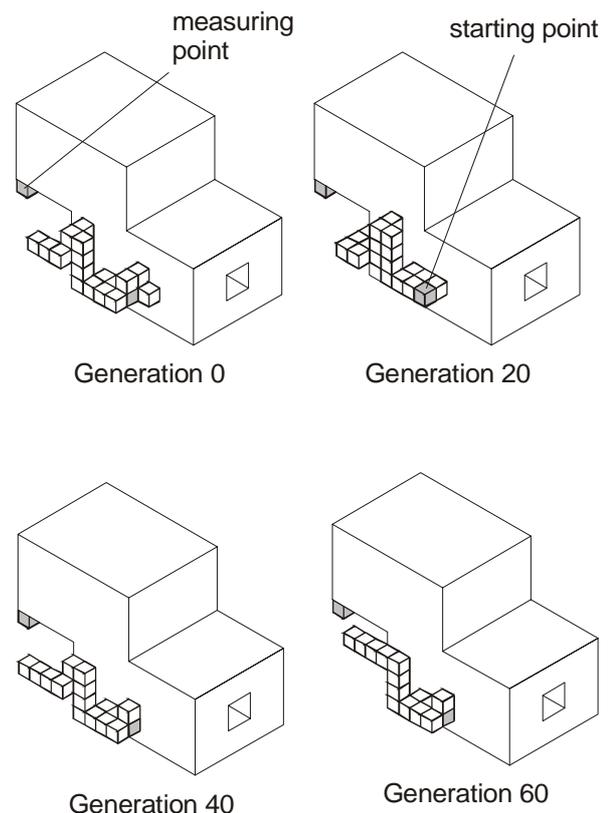

The best program in the generation 100 representing solution of the problem is equal to the expression: LEFT FORWARD FORWARD FORWARD UP UP UP FORWARD FORWARD FORWARD FORWARD FORWARD FORWARD FORWARD RIGHT. The

number of probe steps according to the best NC measuring program is 15. Figure 11 shows tactile probe positions in the start and in the end of measurement.

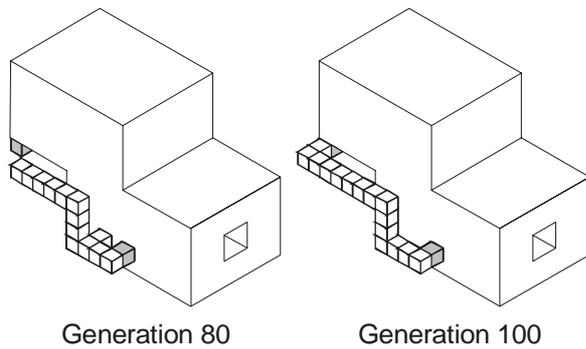


Figure 10. Results of one independent run of the system

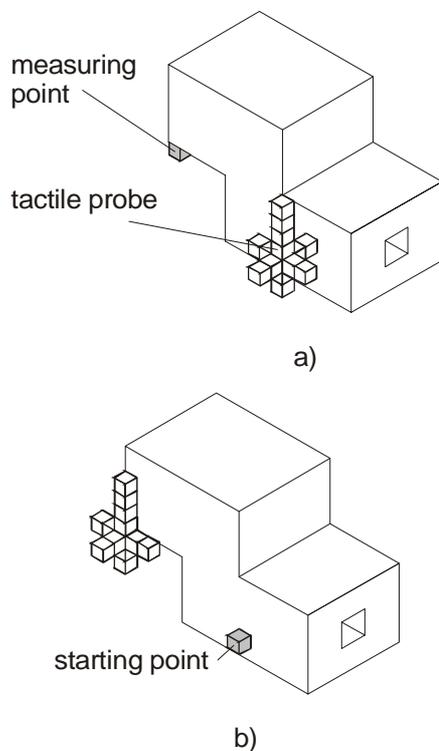


Figure 11. Tactile probe position in the start (a) and in the end (b) of the measurement

5. CONCLUSION

In the paper we presented the concept of automatic programming of coordinate measuring devices by the method of genetic algorithms. Research has shown that the proposed system of evolutionary searching for optimum NC measuring program is efficient and universal.

First we proposed an intelligent system for discrete measuring environment, on the bases of given part, tactile probe, and measuring machine. Then, measuring points are manually selected. The system prepares the strategy of measuring by means of simple rules for

the tool movement. More and more optimal NC measuring programs appear gradually, from generation to generation, as a consequence of interactions between the tactile probe and the part.

Due to complexity of the problems and the size of the solution searching space we used the genetic algorithm method imitating the biological evolution of living beings. The system is capable of autonomously planning and optimising the measuring technology, and detecting the collisions, and verifying whether the measuring points can be accessed with selected tactile probe.

A disadvantage of the system is the discretization of the measuring field, which considerably contributes to the time exactingness of searching for optimal solutions. Therefore, in future the research will be oriented particularly towards conceiving an improved system with the possibility of use of 3D CAD models of measuring environment.

REFERENCES

- [1] Liangsheng Q., Guanhua X., Guohua W.: Optimisation of the measuring path on a coordinate measuring machine using genetic algorithms, *Measurement*, Vol. 23, pp. 159–170, 1998.
- [2] Zhanga S.G., Ajmalb A., Woottona J., Chisholma A.: A feature-based inspection process planning system for co-ordinate measuring machine (CMM), *Journal of Materials Processing Technology*, Vol. 107, pp. 111–118, 2000.
- [3] Kuang-Chao F., Ming C.L.: Intelligent planning of CAD-directed inspection for coordinate measuring machines, *Computer Integrated Manufacturing Systems*, Vol. 11(1-2), pp. 43-51, 1998.
- [4] Brezočnik M., Balič J., Brezočnik Z.: Emergence of intelligence in next-generation manufacturing systems, *Robotics and Computer-Integrated Manufacturing*, Vol. 19(1/2), pp. 55-63, 2003.
- [5] Gen M.: *Genetic Algorithms & Engineering Design*, John Wiley & Sons, Canada, 1997.
- [6] Brezočnik M., Balič J.: A genetic-based approach to simulation of self-organizing assembly, *Robotics and Computer-Integrated Manufacturing*, Vol. 17(1/2), pp. 113-120, 2001.
- [7] Brezočnik M., Kovačič M.: *Integrated Genetic Programming and Genetic Algorithm Approach to Predict Surface Roughness, Materials and Manufacturing Processes*, Vol. 18(3), pp. 475-491, 2003.
- [8] Holland J.N. *Adaptation in natural and artificial systems*, University of Michigan, 1975.
- [9] Goldberg DE. *Genetic Algorithms in Search, Optimization, and Machine Learning*, Addison-Wesley, Reading, Massachusetts, 1989.

Author(s): Miha Kovacic, Miran Brezocnik, Joze Balic, Franci Cus, University of Maribor; Faculty of Mechanical Engineering, Laboratory for Intelligent Manufacturing, SI-2000, Maribor, Slovenia, ++38622207500, ++38622207990, joze.balic@uni-mb.si