

## SKIN-MODEL FOR PRODUCT CHARACTERIZATION IN CO-ORDINATE MEASUREMENT TECHNIQUE

**M.N. Durakbasa<sup>1</sup>, P.H. Osanna<sup>1</sup>, A. Afjehi-Sadat<sup>1</sup> and A. Nomak<sup>2</sup>**

<sup>1</sup> Department for Interchangeable Manufacturing and Industrial Metrology  
Vienna University of Technology, Karlsplatz 13/3113 A-1040 Wien, Austria

<sup>2</sup> Department for Material Science and Manufacturing Technology  
Yildiz Technical University, Istanbul, Turkey

*Abstract: Every manufacturer is looking forward to satisfy all of criteria that its product must have. Means, tools and methods are used to ensure the consistency of product characteristics. One of its important characteristic or feature is geometrical specification or it is better to say Geometrical Product Specifications (GPS) are a means to transform function dependent demands into produced work pieces. This paper introduces the application of analysis of workpiece geometry measurement results regarding the recently developed so-called Skin-Model. This model enables the complete implementation of Geometrical Product Specification and Verification into Co-ordinate Measuring Techniques and vice versa. Selected series of work pieces from industrial manufacturers were measured in the precision measuring laboratory. Based on the measurement results gained it was possible to carry out extensive evaluations by using statistical methods e.g. correlation analysis. As result can be drawn about the correlation between different geometrical deviations and the manufacturing conditions for the achieving lower costs and higher quality in production.*

*Keywords: workpiece geometry, skin-model, GPS, CMT, statistical analysis*

### 1 INTRODUCTION

The "Skin-Model" presents a new description for Geometrical Product Specification and Verification (GPS) with its associated details and on its basis every workpiece can be geometrically defined and considered by applying manipulations of the workpiece geometry [1].


Geometrical Product Specifications are a means to transform function dependent demands into produced workpieces and parts and are based on:

- mathematical rules and methods,
- consideration of macro and micro geometry,
- possibilities for measuring of quantities and especially toleranced quantities and
- evaluation of uncertainty, etc.


Generally there are many definitions and concepts in Geometrical Product Specification (GPS) but one of them which has been presented a few years ago named "Skin-Model" [2] was studied in this research. The "Skin-Model" presents a new description for Geometrical Product Specification and Verification (GPS) with its associated details and on its basis every workpiece can be geometrically defined and considered by applying manipulations of the workpiece geometry. This determination is based on mathematical rules and definitions. It means that according to this determination every workpiece can be designed and on the other hand according to the design it can be measured very clearly.

### 2 THE "SKIN-MODEL"

The Skin-Model is a geometric model of the physical interface between a workpiece and its environment. It defines non-ideal features with consideration of ideal features at the workpiece circumference. A real feature is a non-ideal feature the shape of which depends of the production process and its conditions whereas ideal features exist only in theory (see Fig. 1).

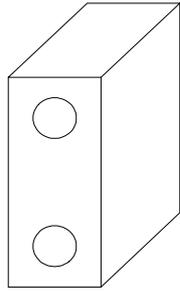

Ideal features

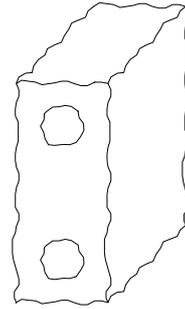

Non-ideal features


**Figure 1.** Ideal model and Skin-Model of a workpiece

The Skin-Model is based on some general and basic definitions and using some tools which are named Operations which can be compared with mathematical operations as in arithmetics.

Operations which are applied within the Skin-Model are:

- 1) Partition,
- 2) Extraction,
- 3) Filtration,
- 4) Association,
- 5) Collection,
- 6) Construction and
- 7) Evaluation.

Figure 2 shows the parallel procedures between "Design Intent" and the "Verification of manufactured workpieces" so that they comply with the design intent [3].

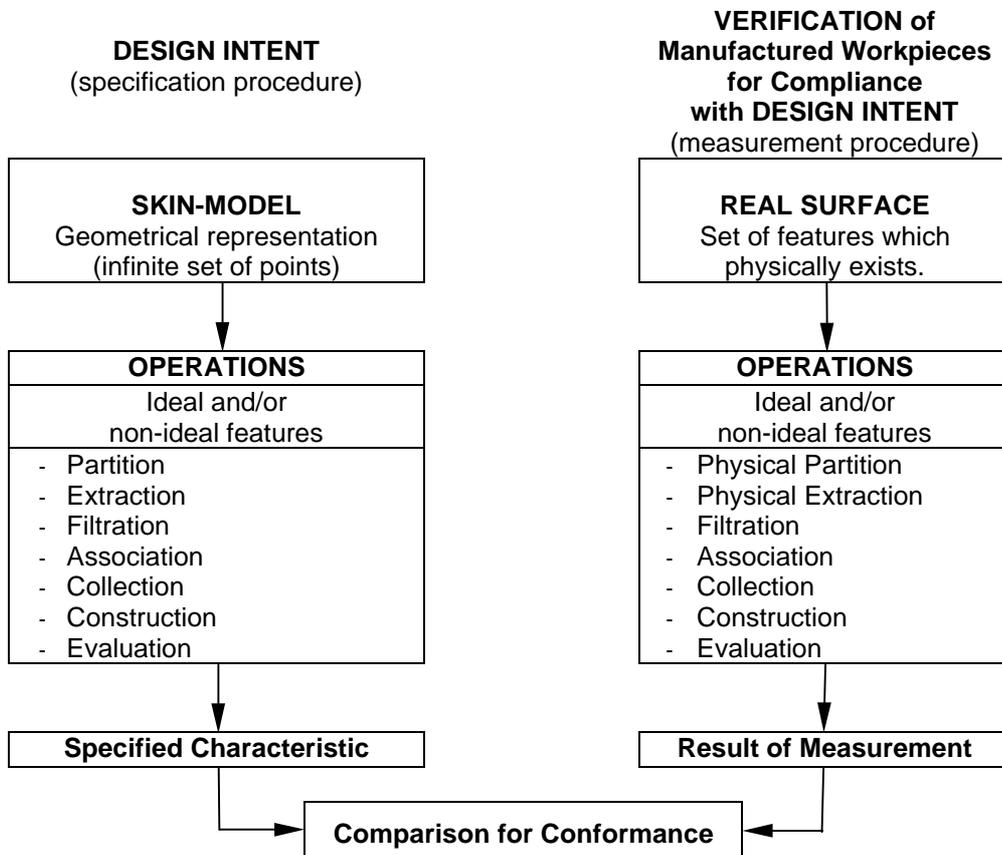

**Figure 2.** Comparison of Design Intent and Verification of manufactured workpieces

### 3 CONCEPT FOR EVALUATION OF MEASUREMENT RESULTS WITH REGARD TO GPS

The principal idea of this research project is the implementation of Geometrical Product Specification and Verification into the Skin-Model on the basis co-ordinate measuring technique by applying a specifically developed evaluation software. The general concept for this statistical evaluation of measurement results is introduced whereas only a first report on results gained up to now can be given. A more generally applicable solution will be given in the near future but additional investigations have to be carried out.

Under industrial conditions manufacturing processes can be divided into two principal groups:

1. The processes of the Testing group: this contains all of main activities which belong mainly to the quality control department, for example: measuring tasks, transformation and transfer of measuring results, primary statistical calculation, etc.
2. The non-testing group, which contains all other activities.

Figure 3 gives an overview of this concept.

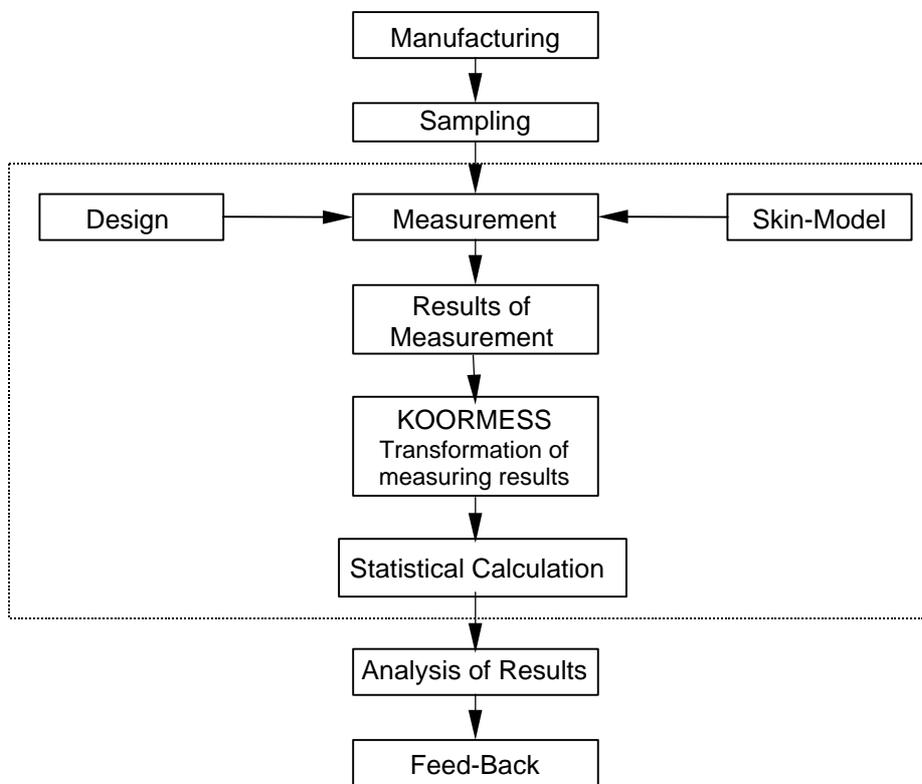


Figure 3. Overview of concept

A sample of workpieces will be taken after manufacturing or production. In the first step, nominal geometrical characteristic or feature can be obtained directly from design and its technical drawings. The operator can find the measuring strategy and characteristic by taking into account the Skin-Model. In the second step the series of workpieces will be measured. By application of the software KOORMESS the measuring results will be transformed into suitable data format that can be used for further calculation and study. In the next step the measuring results will be evaluated with applying computer programs which are available for statistical evaluations. Now the quality control department will be able to analyse this phase easily and can give necessary advice or notice to relevant other departments especially in the developing and planning domain.

### 4 CONCLUDING REMARKS

In the described research work series of different workpieces from industrial manufacturers have been selected and samples of at least 15 parts from each workpiece have been taken. These

workpieces were measured with an accurate co-ordinate measuring machine in a precision measuring laboratory. For statistical evaluation Correlation analysis was chosen and calculations have been carried out for all of these workpieces to investigate the correlation between different characteristics of them.

The correlation between different geometrical deviations and the manufacturing conditions can help to achieve lower costs and higher quality in present production. The presented study can be seen as a further step in the direction of a comprehensive analysis of workpiece geometry and is fully in line with research work already carried out in the past the ideas of which have been presented at former international conferences [4].

## **REFERENCES**

- [1] ISO/TR 14638: Geometrical Product Specification (GPS) - Masterplan. 1995.
- [2] Ballu A., Mathieu L.: Univocal Expression of Functional and Geometrical Tolerances for Design, Manufacturing and Inspection. 4th CIRP Seminar on Computer Aided Tolerancing, Tokyo, Japan, pp.31/46, 1995.
- [3] ISO/TS 17450: Geometrical Product Specification (GPS) - Model for Geometrical Specification and Verification. 1999.
- [4] Osanna, P.H., Durakbasa, N.M.: Comprehensive Analysis of Workpiece Geometry by Means of Co-ordinate Measurement Technique. Surface Topography 1 (1988), pp. 135/141.

**AUTHORS:** Ass.Prof. Prof.h.c. Dr.techn. M.N. DURAKBASA, Univ.Prof. Dr.techn. Dr.h.c. P. Herbert OSANNA, Lecturer Dr. A. AFJEHI-SADAT, Department for Interchangeable Manufacturing and Industrial Metrology, Vienna University of Technology - TU-Wien, Karlsplatz 13/3113, A-1040 Vienna, Austria, Phone: +43 1 58801 31142 and +43 1 58801 31145, Fax: 43 1 58801 31196, E-mail: [durakbasa@mail.ift.tuwien.ac.at](mailto:durakbasa@mail.ift.tuwien.ac.at) and [afjehi@mail.ift.tuwien.ac.at](mailto:afjehi@mail.ift.tuwien.ac.at) , Dipl.-Ing. A. NOMAK, Department for Material Science and Manufacturing Technology, Yildiz Technical University, Istanbul, Turkey